




# Micro Switch

# MSW Series




## Ordering Information

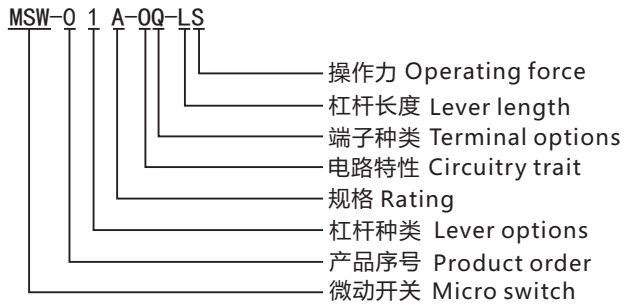


## Specification

- 规格 Rating: ( ) 10A 125/250VAC  
(A) 16A 125/250VAC  
(B) 5A 125/250VAC
- 接触电阻 Contact Resistance: 20mΩ max
- 绝缘电阻 Insulation Resistance: 500VDC 100MΩ min
- 耐电压 Dielectric Strength: 1500VAC, 1Minute
- 环境温度 Ambient Temperature: -25°C ~ +85°C
- 电气寿命 Electrical Life: 100,000 Cycles

### Circuitry trait

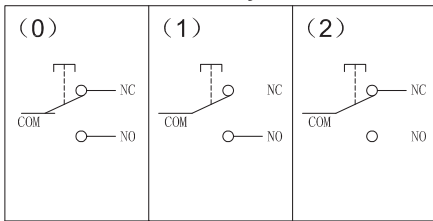

### Terminal options

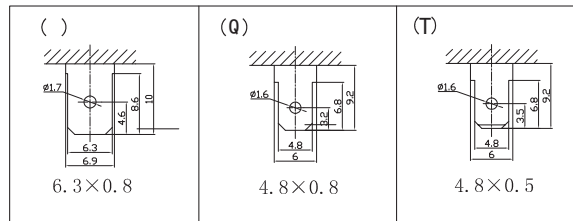

### Operating force

L : 35g±15g  
S: 160g±40g  
H: 320g±80g

|  |  |  |  |  |
|--|--|--|--|--|
|  | <p><b>MSW-01</b> ON-(ON)<br/>10A 125/250VAC<br/><b>MSW-01A</b> ON-(ON)<br/>16A 125/250VAC<br/>SPDT 3P</p>                      |  |  |  |
|  | <p><b>MSW-02</b> ON-(ON)<br/>10A 125/250VAC<br/><b>MSW-02A</b> ON-(ON)<br/>16A 125/250VAC<br/>SPDT 3P<br/>L=13; 27; 38; 53</p> |  |  |  |
|  | <p><b>MSW-03</b> ON-(ON)<br/>10A 125/250VAC<br/><b>MSW-03A</b> ON-(ON)<br/>16A 125/250VAC<br/>SPDT 3P<br/>L=12; 25</p>         |  |  |  |
|  | <p><b>MSW-04</b> ON-(ON)<br/>10A 125/250VAC<br/><b>MSW-04A</b> ON-(ON)<br/>16A 125/250VAC<br/>SPDT 3P</p>                      |  |  |  |