

Home > Products > Proximity Sensors > Inductive Sensors > LR_Y series



LR08BF02DPOY-E1


1



Contact engineer

buy online

[3D graph](#)
[Size graph](#)
[Connection graph](#)
[Collection](#)
[Print page](#)
[Share](#)

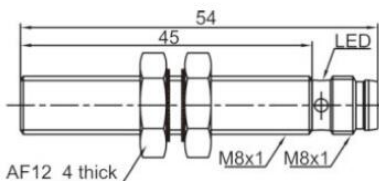

[Download](#)

parameter Download Enclosure

Function	Extend sensing distance
Mounting	Quasi-flush
Sensing distance	2mm
Assured distance	0...1.6mm
Standard target	Fe 8*8*1t
Cylindrical size	M8*1*54mm
Output ways	PNP
Output status	NO
Residual voltage	≤2.5V
Supply voltage	10...30VDC
Load current	≤150mA
Current consumption	≤10mA
Switching frequency	1500Hz
Assured distance	≤±10%
Hysteresis range	1...20%
Repeat accuracy	≤3%
Ambient temperature	-25°C...70°C
Ambient humidity	35-95%RH
Circuit protection	Short circuit protection, overload protection, reverse polarity protection
Insulation resistance	≥50MΩ(500VDC)
Vibration resistance	Complex amplitude 1.5mm 10...50Hz(X,Y,Z 2 hours at each direction)
Protection degree	IP 67
Output indicator	Yellow LED
Housing material	Stainless steel
Certification	CE
Connection	M8 connector